

---

C T U B

# AppointmentToTicket

Release rel-10.1

Rother OSS GmbH

Dec 14, 2024



---

## Contents

---

<b>1</b>	<b>Description</b>	<b>3</b>
<b>2</b>	<b>System requirements</b>	<b>5</b>
2.1	Framework . . . . .	5
2.2	Packages . . . . .	5
2.3	Third-party software . . . . .	5
<b>3</b>	<b>Configuration Reference</b>	<b>7</b>
3.1	Frontend::Agent::ModuleRegistration::Loader . . . . .	7
3.2	Frontend::Agent::View::AgentAppointmentEdit . . . . .	7
3.3	Frontend::Agent::View::TicketCalendar . . . . .	8
3.4	Frontend::Base::DynamicFieldScreens . . . . .	8
<b>4</b>	<b>About</b>	<b>9</b>
4.1	Contact . . . . .	9
4.2	Version . . . . .	9



C T U B V



# CHAPTER 1

---

## Description

---

This package brings the functionality to automatically create a ticket with configurable parameters to a freely chooseable point in time in relation to an appointment.

Ticket Creation is initiated in the AppointmentEdit mask under the section ‘Ticket Creation’. A point in time relative to the appointment, as well as ticket data can be configured. Recurring appointments are supported.

The feature as of now does not support dynamic fields of type database.

**Ticket Creation**

---

Ticket:

Relative point of time:

Date/Time:     -

\* Customer user:

\* Queue:

\* Priority:

\* State:

Article is visible for customer

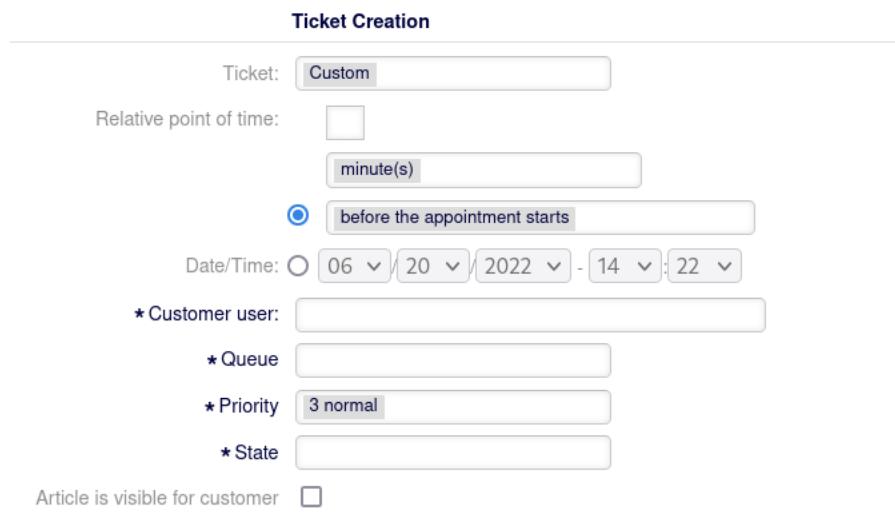


Fig. 1.1: The screenshot shows the newly available fields for ticket creation.



# CHAPTER 2

---

## System requirements

---

### 2.1 Framework

OTOBÖ 10.1.x

### 2.2 Packages

-

### 2.3 Third-party software

-



# CHAPTER 3

---

## Configuration Reference

---

### 3.1 Frontend::Agent::ModuleRegistration::Loader

#### 3.1.1 Loader::Module::AgentAppointmentCalendarOverview###009-AppointmentTicket

Loadermodule registration for the agent interface.

### 3.2 Frontend::Agent::View::AgentAppointmentEdit

#### 3.2.1 Ticket::Frontend::AgentAppointmentEdit###ServiceMandatory

Sets if service must be selected by the agent.

#### 3.2.2 Ticket::Frontend::AgentAppointmentEdit###DynamicField

Dynamic fields shown in the appointment edit screen of the agent interface

#### 3.2.3 Ticket::Frontend::AgentAppointmentEdit###StateDefault

Sets the default next state for new tickets in the AgentAppointmentEdit interface.

#### 3.2.4 Ticket::Frontend::AgentAppointmentEdit###SLAMandatory

Sets if SLA must be selected by the agent.

### **3.2.5 Ticket::Frontend::AgentAppointmentEdit###Priority**

Sets the default priority for new tickets in the AgentAppointmentEdit interface.

## **3.3 Frontend::Agent::View::TicketCalendar**

### **3.3.1 Ticket::Frontend::AgentAppointmentEdit###StateType**

Determines the next possible ticket states, after the creation of a new ticket from a calendar appointment in the agent interface.

## **3.4 Frontend::Base::DynamicFieldScreens**

### **3.4.1 DynamicFieldScreens###AppointmentTickets**

This configuration defines all possible screens to enable or disable dynamic fields.

# CHAPTER 4

---

About

---

## 4.1 Contact

Rother OSS GmbH  
Email: [hello@otobo.de](mailto:hello@otobo.de)  
Web: <https://otobo.de>

## 4.2 Version

Author: Rother OSS GmbH / Version: rel-10.1 / Date of release: 2024-12-14